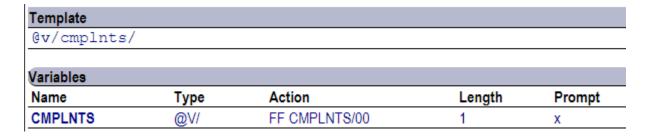# FF CMPLNTS

## What it does:

This function allows you to control the people and cases users can attach to a document.  They can choose 1 or more people, with or without cases.  This is included in almost every template.

## Used in template:

| Template | | | | |
|---|---|---|---|---|
| @v/cmplnts/ | | | | |

| Variables | | | | |
|---|---|---|---|---|
| **Name** | **Type** | **Action** | **Length** | **Prompt** |
| CMPLNTS | @V/ | FF CMPLNTS/00 | 1 | x |

## What the user sees:



The user will see a list of cases for the people associated with the case.  You can select the people and cases to attach to the document.

## Output:

There is no output from this function, but all the other functions will output information about the names and cases selected.

### FF CMPLNTS/00 – Select 1 or more people, with or without a case

This function is used to specify which names and cases to attach to a document.  The long description delineates exactly what may be selected.

### FF CMPLNTS/01 – Select 1 person, with or without 1 case

### FF CMPLNTS/02 – Select 1 or more people, each with a case

## FF CMPLNTS/03 – Select 1 person, with 1 case

### FF CMPLNTS/04 – Select 1 person, with or without cases

### FF CMPLNTS/05 – Select 1 person, with 1 or more cases

### FF CMPLNTS/06 – Select 1 person, with no cases

### FF CMPLNTS/07 – Select 1 or more people, with no cases