FF OTHERID

What it does:

Displays a list of other IDs for each person attached to the document. Allows user to select one or more IDs. This prints in various formats, with or without the notes.


Used in template:

```
Template
@v/cmplnts/

FF OTHERID/00: @v/00/||
FF OTHERID/01: @v/01/||
FF OTHERID/02: @v/02/||
FF OTHERID/03: @v/03/||
FF OTHERID/04: @v/04/||
```

| Variables | | | | |
|-----------|------|---------------|--------|--------|
| Name | Type | Action | Length | Prompt |
| 00 | @V/ | FF OTHERID/00 | 1 | X |
| 01 | @V/ | FF OTHERID/01 | 1 | Χ |
| 02 | @V/ | FF OTHERID/02 | 1 | X |
| 03 | @V/ | FF OTHERID/03 | 1 | X |
| 04 | @V/ | FF OTHERID/04 | 1 | Χ |
| CMPLNTS | @V/ | FF CMPLNTS/00 | 1 | X |

What the user sees:

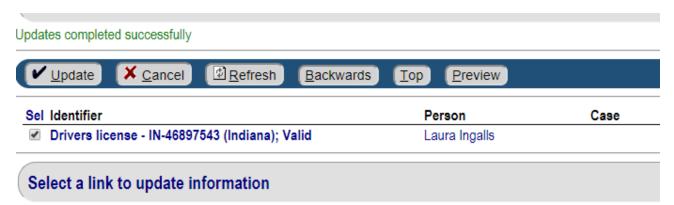

Laura Ingalls List other identifiers Add a new identifier

The user will select the other ID they wish to include.

10/28/2018 FFOTHERID Page | 1

Output:

```
FF OTHERID/00: Laura Ingalls (1)
Drivers license - IN-46897543 (Indiana); Valid
Only has 1 point left.

FF OTHERID/01: Drivers license - IN-46897543 (Indiana); Valid
Only has 1 point left.

FF OTHERID/02: Laura Ingalls (1)
Drivers license - IN-46897543 (Indiana); Valid

FF OTHERID/03: Drivers license - IN-46897543 (Indiana); Valid

FF OTHERID/04: IN-46897543 (Indiana); Valid
```

FF OTHERID/00 - Select other ids - w/name and notes

Displays a list of otherids for each identity tied to the document. Allows the selection of one or more. Output is formatted as:

```
John Smith (1234)
ISETS Number - 12345
Gang affiliation - Blues
Member of the gang for 5 years. Shows no signs of quitting.

Jane Smith (1239)
ISETS Number - 12345
Gang affiliation - Blues
Newest member of the gang.
```

FF OTHERID/01 – Select other ids - no name, w/notes

Displays a list of otherids for each identity tied to the document. Allows the selection of one or more. Output is formatted as:

```
ISETS Number - 12345
Gang affiliation - Blues
Member of the gang for 5 years. Shows no signs of quitting.
ISETS Number - 12345
Gang affiliation - Blues
Newest member of the gang.
```

10/28/2018 FFOTHERID P a g e | **2**

FF OTHERID/02 - Select other ids - w/name, no notes

Displays a list of otherids for each identity tied to the document. Allows the selection of one or more. Output is formatted as:

John Smith (1234)
ISETS Number - 12345
Gang affiliation - Blues

Jane Smith (1239)
ISETS Number - 12345
Gang affiliation - Blues

FF OTHERID/03 – Select other ids - no name or notes

Displays a list of otherids for each identity tied to the document. Allows the selection of one or more. Output is formatted as:

ISETS Number - 12345 Gang affiliation - Blues ISETS Number - 12345 Gang affiliation - Blues

FF OTHERID/04 - Select other ids - just the id

Displays a list of otherids for each identity tied to the document. Allows the selection of one or more. Output is formatted as:

12345

10/28/2018 FFOTHERID P a g e | **3**